

KFF6106B

1090 MHz TCAS BPF

Rev 1 - Origin Date: June 13, 2014 - Revision Date: November 8, 2021

Features

- Low Loss
- Narrow Bandwidth
- Excellent Return Loss


Description

Pin mounted, silver (Ag) coated ceramic filter. Developed for use in TCAS applications.

Weight: 20.1 grams typical

Material: Filter is composed of a ceramic block plated with Ag and a bracket consisting of Olin 770 Copper Alloy (Cu, Zn, Ni)

Filter complies with RoHS standards.

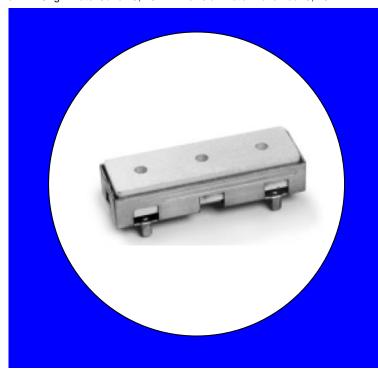

Electrical Specifications

Parameter	Frequency (MHz)	Typical @ 25ºC	Spec. @ 25ºC	Spec. @ -40°C to +85°C
Passband Insertion Loss	1087 - 1093	0.7 dB	1.0 dB max	1.2 dB max
Passband Return Loss	1087 - 1093	18.0 dB	14.0 dB min	12.0 dB min
Attenuation	970	44.0 dB	40.0 dB min	40.0 dB min

Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:

Specification Allowance

Insertion Loss 0.1 dB
Return Loss 1.0 dB
Stopbands 1.0 dB




KFF6106A


1090 MHz TCAS BPF

Mechanical Drawing


Rev 1 – Origin Date: June 13, 2014 – Revision Date: November 8, 2021

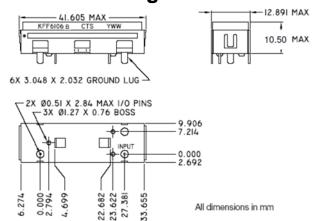

Electrical response

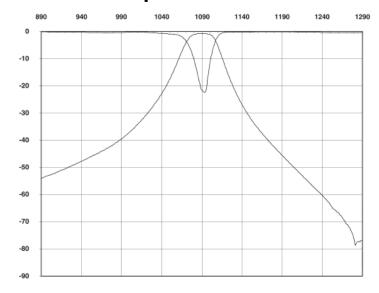


PCB Layout

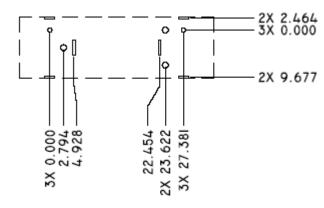


VIEW LOOKING DOWN ON FILTER TO PC BOARD

Packaging and Marking



This product is shipped in pre-formed foam trays.



5 10 Slot foam Trays(100 max. per box)