

# MCB1795A - Preliminary


## 17.70-18.20GHz mmWave ClearPlex Bandpass Filter

### Features

- High-Q Low-Loss with High Rejection

### Applications

- mmWave carrier-grade Infrastructure applications



Part Dimensions: 13.6 × 3.2 × 1.3 mm • <1.0 g

### Description

Surface mount bandpass filter with I/Os that can interface to micro-strip transmission lines on the top-layer of customer PCBs. Superior rejection, insertion loss, reliability, temperature stability as well as both peak and average power handling compared to other mmWave bandpass filter technologies.

### Electrical Specifications


Parameter	Frequency (GHz)	Typical at 25°C	Spec. at 25°C	Spec. over -40°C to +85°C
Nominal Impedance	-	50 ohms	-	-
Average Input Power	-	-	-	5.0 Watt max
Peak Input Power	-	-	-	50 Watt max
<b>Input-Output Response</b>				
Passband Insertion Loss	17.70 - 18.20			3.0 dB <b>Max</b>
Passband Ripple	17.70 - 18.20			1.2 dB <b>Max</b>
Passband Return Loss	17.70 - 18.20			14 dB <b>Goal</b> 12 dB <b>Min</b>
Attenuation:	16.70			40 dB <b>Min</b>
	19.20			40 dB <b>Goal</b>

Note: CTS tests each unit to the critical specifications above. Subsequent audits may deviate due to repeatability among different test systems which shall not exceed these allowances.

#### Specification Allowance


Insertion Loss	0.1 dB
Return Loss	1.0 dB
Attenuation	1.0 dB

### Mechanical Drawing

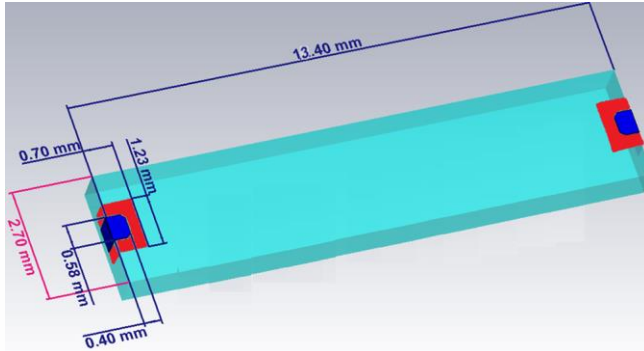

Dim.	Nominal (mm)	Tolerance (±mm or Max)
A	13.40	0.20
B	2.70	0.30
C		
D		
E		
F		
G		
H	1.10	0.20
I		
J		

### PCB Layout

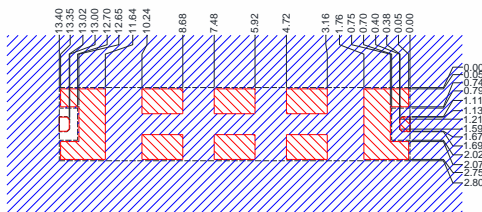


-----	Filter Outline	□	Solder Resist Over Dielectric
▨	Exposed Conductor	▨	Solder Resist Over Conductor

### Packaging and Marking

Dimension	Units	Spec.
Reel Diameter	mm	330
Reel Weight	kg	x.x
Reel Quantity	ea.	Xxx

Product Marking  
No marking on the filters

Customer Feed Direction → → →

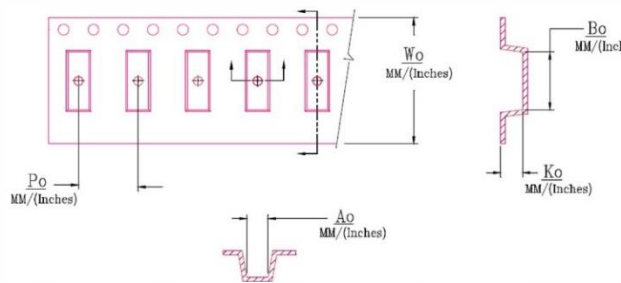

$W_0$	$A_0$	$B_0$	$K_0$	$P_0$
1.732 in 44.0 mm	x.xxx in x.xx mm	x.xxx in x.xx mm	x.xxx in x.xx mm	x.xxx in x.xx mm

### Electrical Response

