

# USB477A - PRELIMINARY

## 4720-4820MHz USB Series TDD Bandpass Filter

### Features

- Low Loss with High Rejection and Low Ripple
- Support for 3GPP Receive Blocker specification
- Universal footprint across family for all TDD bands



### Applications

- Wireless Infrastructure applications
- High-performance carrier-grade single-band TDD Pico-cell basestations for up to 5.0W at the antenna port.

Part Dimensions: 25.7 × 4.8 × 6.6 mm • 2.5 g  
Materials: Ag plated ceramic block with tin plated brass shield

### Description

Surface mount ceramic bandpass filter supports a universal footprint across all TDD frequency bands enabling the use of a common system PCB. Superior rejection, insertion loss, reliability, as well as both peak and average power handling compared to other bandpass filter technologies.

### Electrical Specifications

Parameter	Frequency (MHz)	Typical at 25°C	Spec. at 25°C	Spec. over -40°C to +85°C
Nominal Impedance	-	50 ohms	-	-
Average Input Power	-	-	-	8.0 Watt max
Peak Input Power	-	-	-	80 Watt max

#### Input-Output Response


Passband Insertion Loss (5 MHz avg)	4720-4820	2.1 dB	2.2 dB max	2.3 dB max
Passband Ripple	4720-4820	1.3 dB	1.5 dB max	1.6 dB max
Passband Return Loss	4720-4820	14 dB	12 dB min	12 dB min
Attenuation:	1-4700	9 dB	8 dB min	7 dB min
	4840-TBD	9 dB	8 dB min	7 dB min

Note: CTS tests each unit to the critical specifications above. Subsequent audits may deviate due to repeatability among different test systems which shall not exceed these allowances.

#### Specification Allowance


Insertion Loss	0.1 dB
Return Loss	1.0 dB
Attenuation	1.0 dB

### Mechanical Drawing

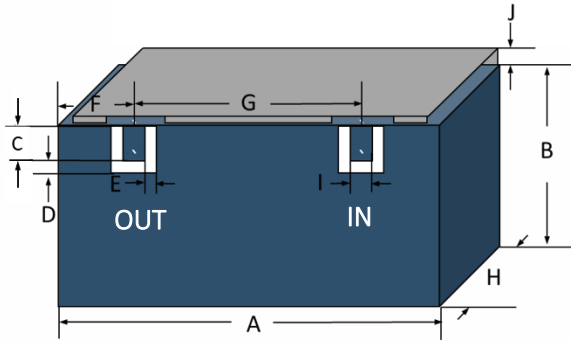

Dim.	Nominal (mm)	Tolerance (±mm or Max)
A	25.40	0.30
B	3.00	max
C	1.70	0.13
D	0.80	0.13
E	0.80	0.13
F	4.20	0.13
G	16.90	0.13
H	6.40	0.20
I	1.00	0.13
J	0.90	0.20

### PCB Layout

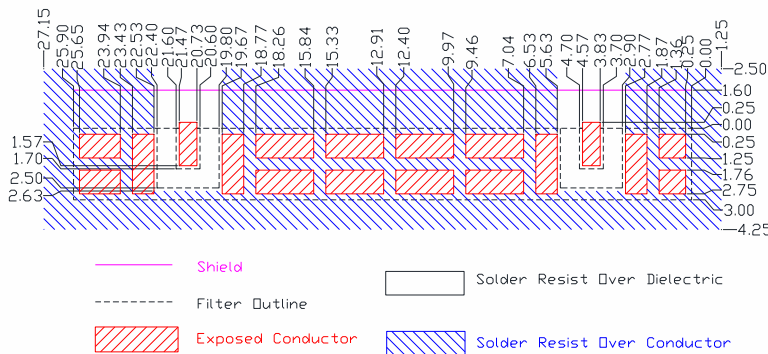


**IMPORTANT:** Please assure  $\geq 20$  mils (0.5mm) thickness of dielectric beneath the I/O Pads and surrounding clearance zone to the required ground plane.

**NOTE:** The width of 9.50mm is necessary to support frequencies as low as 1885MHz for Band 39. If only higher frequency TDD bands are supported, then a smaller space can be allocated on the layout.

### Packaging and Marking

Dimension	Units	Spec.	Product Marking
Reel Diameter	mm	330	CTS
Reel Weight	kg	5.5	477
Reel Quantity	ea.	500	YWW

Customer Feed Direction → → →

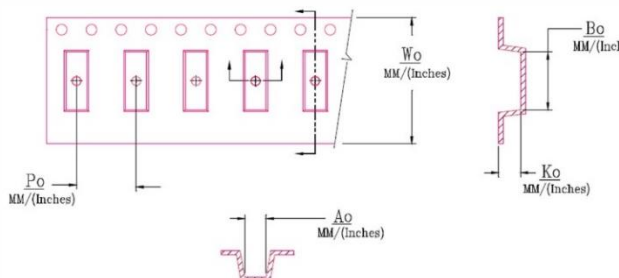

$W_o$	$A_o$	$B_o$	$K_o$	$P_o$
1.732 in 44.0 mm	0.209 in 5.30 mm	1.028 in 26.10 mm	0.283 in 7.20 mm	0.472 in 12.0 mm

### Electrical Response

