

USD014A


Band 14 USD Series Duplexer

Features

- Low Loss with High Rejection
- Superior power handling and reliability
- Universal footprint across all FDD frequency bands

Applications

- Wireless Infrastructure applications
- High-performance carrier-grade small-cells using linearized PA for 1.0-2.0W at the antenna port.
- Wide-band pico-cells or small-cells requiring multi-channel or carrier aggregation.

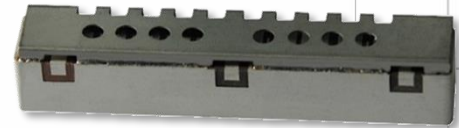

Part Dimensions: 63.0 × 14.8 × 10.9 mm • 35.4 g
Materials: Ag plated ceramic block with tin plated brass shield

Description

Surface mount ceramic duplexer supports a universal footprint across all FDD frequency bands enabling the use of a common system PCB. Provides superior rejection, insertion loss, reliability, as well as both peak and average power handling compared to other duplexer technologies.

Electrical Specifications

Parameter	Frequency (MHz)	Typical at 25°C	Spec. at 25°C	Spec. over -40°C to +85°C
Nominal Impedance	-	50 ohms	-	-
Average Input Power	-	-	-	6.0 Watt max
Peak Input Power	-	-	-	60 Watt max

Antenna to UL Response

Passband Insertion Loss (5 MHz avg)	788 - 798	2.1 dB	2.3 dB max	2.5 dB max
Passband Return Loss	788 - 798	16 dB	14 dB min	14 dB min
Attenuation:	758 - 768	67 dB	66 dB min	66 dB min

DL to Antenna Response

Passband Insertion Loss (5 MHz avg)	758 - 768	2.1 dB	2.3 dB max	2.5 dB max
Passband Return Loss	758 - 768	16 dB	14 dB min	14 dB min
Attenuation:	788 - 798	71 dB	70 dB min	70 dB min


DL to UL Response

Attenuation for UL band	788 - 798	72 dB	70 dB min	70 dB min
Attenuation for DL band	758 - 768	67 dB	66 dB min	66 dB min

Note: CTS tests each unit to the critical specifications above. Subsequent audits may deviate due to repeatability among different test systems which shall not exceed these allowances.


Specification Allowance	
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Attenuation	1.0 dB

Mechanical Drawing

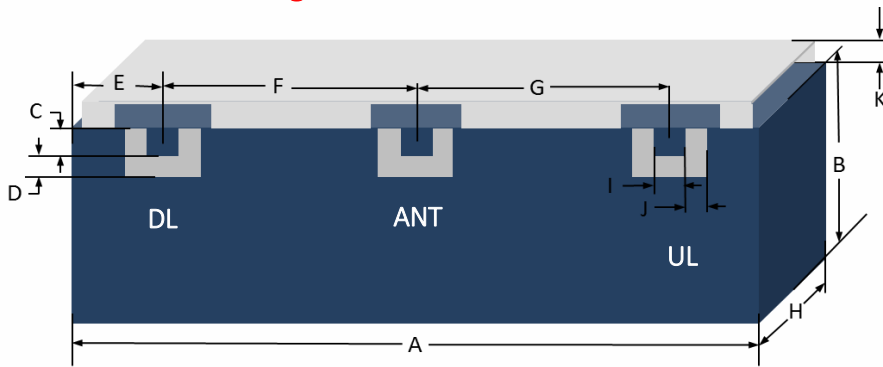


Dim.	Nominal (mm)	Tolerance (±mm or Max)
A	63.00	Max
B	13.00	Max
C	2.03	0.13
D	1.27	0.13
E	6.49	0.13
F	24.21	0.13
G	24.21	0.13
H	10.70	Max
I	2.03	0.13
J	1.27	0.13
K	1.80	0.13

PCB Layout

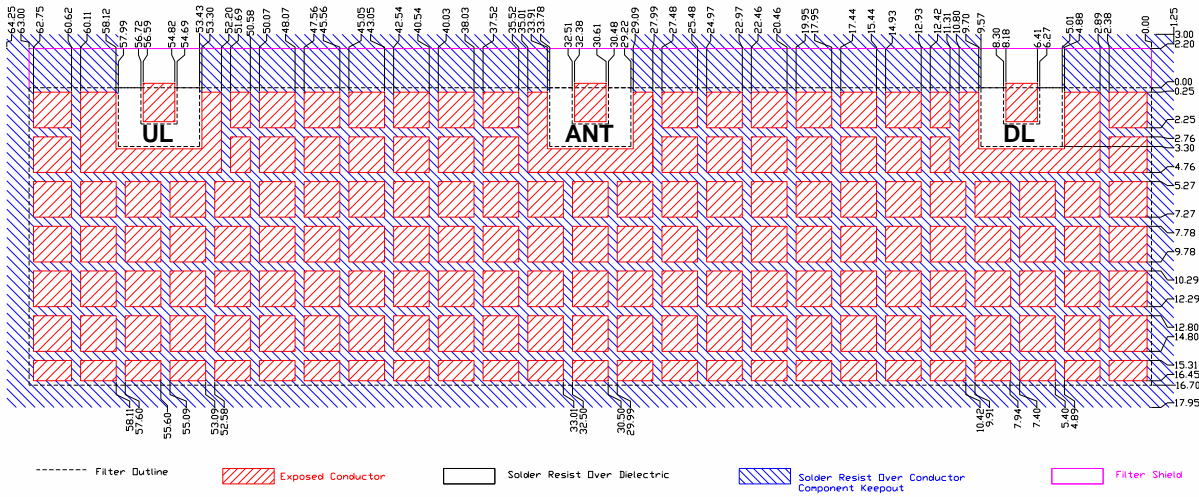

Packaging and Marking

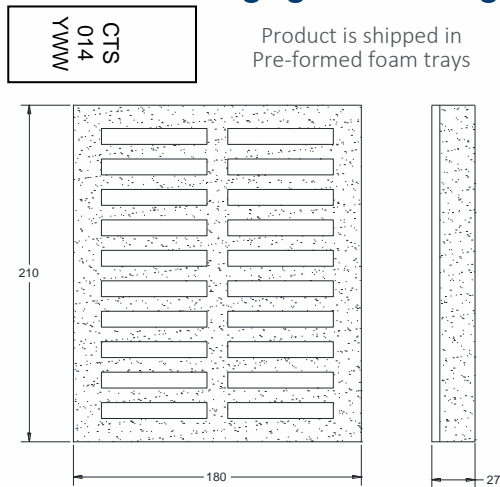

The trays have 20 slots each with 1 filter per slot. Boxes are packed with 12 Trays per box for a total of 240 filters per box.

Electrical Response

