

Model 137

Stratum 3, DIL OCXO (SMT or TH)

Features

- Compliant to Stratum 3 of GR-1244-Core
- Surface Mount or Thru hole DIL Package
- 3.3V or 5.0V operation
- Low Jitter/Phase Noise
- Tape and Reel Packaging



Part Dimensions: 20.3 × 12.7 × 11.0 mm

Description

The CTS Model 137 is a low cost, small size, high performance OCXO. The high quality CTS Quartz Crystal used in this OCXO offers high stability and low jitter/phase noise, making it the ideal choice for any telecommunications system. Other applications include: Telecom Switching, Wireless Communication and Timing over Packet.

Ordering Information

| Model | Stability | Temp Range | Supply Voltage | EFC | Package Style | Frequency | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|---|------------|----------------|----------|---------------|---------------|----------|---|---------|---|------|------------|---|-------------|---|-------------|---|---------------|---|---------------|---|---------------|--|------|------|---|---------|---|-----------|---|------|------|---|-----|---|------|--|------|------|---|-----------|---|-----|---|------|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 137 | <u>N</u> | <u>B</u> | <u>E</u> | <u>N</u> | <u>T</u> | <u>XXMXXX</u> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Code</th> <th>Specifications</th> </tr> </thead> <tbody> <tr> <td>N</td> <td>±250 ppb</td> </tr> <tr> <td>R</td> <td>±100 ppb</td> </tr> <tr> <td>T</td> <td>±50 ppb</td> </tr> </tbody> </table> | Code | Specifications | N | ±250 ppb | R | ±100 ppb | T | ±50 ppb | <table border="1"> <thead> <tr> <th>Code</th> <th>Temp Range</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>0°C to 50°C</td> </tr> <tr> <td>B</td> <td>0°C to 70°C</td> </tr> <tr> <td>C</td> <td>-10°C to 60°C</td> </tr> <tr> <td>D</td> <td>-20°C to 70°C</td> </tr> <tr> <td>G</td> <td>-40°C to 85°C</td> </tr> </tbody> </table> | Code | Temp Range | A | 0°C to 50°C | B | 0°C to 70°C | C | -10°C to 60°C | D | -20°C to 70°C | G | -40°C to 85°C | <table border="1"> <thead> <tr> <th>Code</th> <th>Spec</th> </tr> </thead> <tbody> <tr> <td>D</td> <td>5V ± 5%</td> </tr> <tr> <td>E</td> <td>3.3V ± 5%</td> </tr> </tbody> </table> | Code | Spec | D | 5V ± 5% | E | 3.3V ± 5% | <table border="1"> <thead> <tr> <th>Code</th> <th>Spec</th> </tr> </thead> <tbody> <tr> <td>V</td> <td>EFC</td> </tr> <tr> <td>N</td> <td>None</td> </tr> </tbody> </table> | Code | Spec | V | EFC | N | None | <table border="1"> <thead> <tr> <th>Code</th> <th>Spec</th> </tr> </thead> <tbody> <tr> <td>T</td> <td>Thru Hole</td> </tr> <tr> <td>S</td> <td>SMT</td> </tr> </tbody> </table> | Code | Spec | T | Thru Hole | S | SMT | <table border="1"> <thead> <tr> <th>Code</th> <th>Frequency (MHz)</th> </tr> </thead> <tbody> <tr> <td>10M000</td> <td>10.000</td> </tr> <tr> <td>12M800</td> <td>12.800</td> </tr> <tr> <td>16M384</td> <td>16.384</td> </tr> <tr> <td>19M440</td> <td>19.440</td> </tr> <tr> <td>20M000</td> <td>20.000</td> </tr> <tr> <td>25M000</td> <td>25.000</td> </tr> <tr> <td>26M000</td> <td>26.000</td> </tr> <tr> <td>Custom</td> <td>XXMXXX</td> </tr> </tbody> </table> | Code | Frequency (MHz) | 10M000 | 10.000 | 12M800 | 12.800 | 16M384 | 16.384 | 19M440 | 19.440 | 20M000 | 20.000 | 25M000 | 25.000 | 26M000 | 26.000 | Custom | XXMXXX |
| Code | Specifications | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| N | ±250 ppb | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R | ±100 ppb | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| T | ±50 ppb | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Code | Temp Range | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A | 0°C to 50°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | 0°C to 70°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C | -10°C to 60°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | -20°C to 70°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| G | -40°C to 85°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Code | Spec | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | 5V ± 5% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| E | 3.3V ± 5% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Code | Spec | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| V | EFC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| N | None | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Code | Spec | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| T | Thru Hole | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| S | SMT | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Code | Frequency (MHz) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10M000 | 10.000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12M800 | 12.800 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16M384 | 16.384 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 19M440 | 19.440 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 20M000 | 20.000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25M000 | 25.000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 26M000 | 26.000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Custom | XXMXXX | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Stability Matrix

| Code | Temp Range | Stability | | |
|------|---------------|----------------|----------------|---------------|
| | | N (±250ppb) | R (±100ppb) | T (±50ppb) |
| A | 0°C to 50°C | * | * | * |
| B | 0°C to 70°C | * | * | * |
| C | -10°C to 60°C | * | * | * |
| D | -20°C to 70°C | * | * | * |
| G | -40°C to 85°C | * | * | * |

Part Number Example: 137RBENT20M000



Electrical Specifications

| Parameter | Conditions & Remarks | Min | Typical | Max | Unit |
|-----------|----------------------|-----|---------|-----|------|
|-----------|----------------------|-----|---------|-----|------|

Operating Conditions

| | | | | | |
|-----------------------------|------------------------|---------------|------------|---------------|-----|
| Operating Temperature Range | See How to Order Table | -40 | - | +85 | °C |
| Supply Voltage (Vcc) | See How to Order Table | 3.135 4.75 | 3.3 5.0 | 3.465 5.25 | Vdc |
| Power Consumption | During warm up | - | 1.8 | 2.5 | W |
| | Steady state @ 25°C | - | 0.75 | 1.0 | W |
| Load | Output to Ground | 5 | 10 | 15 | Pf |

Frequency Stability

| | | | | | |
|----------------------------|--|---|--|-----------|---------|
| Frequency | F_{NOM} | | Std Frequencies: 10, 12.8, 16.384, 19.44, 20, 25, 26 | | MHz |
| Calibration | $\Delta F/F_{NOM}$; $T_A = 25^\circ\text{C}$; at time of shipment | - | ± 0.2 | ± 0.5 | ppm |
| Temperature Stability | -40 to +85°C (See Ordering Information table for available stability options) | - | ± 100 | - | ppb |
| Voltage Stability | $V_{CC} \pm 5\%$ | - | ± 5 | - | ppb |
| Aging | Per day | - | - | ± 5 | ppb |
| | Per year | - | - | ± 500 | ppb |
| | 10 years | - | - | ± 3.5 | ppm |
| 24-Hour Holdover Stability | Inclusive of operating temp and 24hours aging drift (Stability option R) | - | - | 0.37 | ppm |
| Total Free-Run Accuracy | Under all operating conditions for 10 years | - | - | ± 4.6 | ppm |
| Drift (24 hours) | Constant temperature per GR-1244-CORE | - | - | ± 40 | ppb |
| Wander Generation | MTIE and TDEV per Stratum 3 requirements of Telcordia GR-1244-CORE | | | | |
| Warmup-Up Time | $T_A=25^\circ\text{C}$; to within 10ppb of freq. @ 30 min | - | - | 5 | minutes |

Electronic Frequency Control – EFC (option)

| | | | | | |
|---------------|---------------------------|-----------|------------|--------|-----|
| Voltage Range | VC, Control voltage range | 0.1Vcc | - | 0.9Vcc | V |
| Pulling Range | At time of shipment | ± 8.0 | ± 10.0 | - | ppm |
| Linearity | | - | - | 10 | % |



Electrical Specifications (continued)

| Parameter | Conditions & Remarks | Min | Typical | Max | Unit |
|--------------------------|------------------------|-------------|---------|-------------|--------|
| Output Parameters | | | | | |
| Waveform | | | HCMOS | | |
| Amplitude | V_{OL} V_{OH} | - 0.9Vcc | - - | 0.1Vcc - | Vdc |
| Rise / Fall Times | 10% to 90% @ 10pf load | - | 3 | 5 | ns |
| Duty Cycle | @ 50% of output signal | 45 | 50 | 55 | % |
| Phase Noise (10MHz) | Offset = 10Hz | - | -105 | - | dBc/Hz |
| | 100Hz | - | -135 | - | |
| | 1KHz | - | -150 | - | |
| | 10KHz | - | -154 | - | |
| Spurious | | - | - | -70 | dBc |

Mechanical and Environmental


| Parameter | Condition |
|---------------------------|--|
| Soldering | Maximum reflow temperature, 245°C for 10seconds, 240°C for 20seconds, per IPC/JEDEC J-STD-202D Note: Not intended for inverted reflow |
| MSL | Level 1 |
| RoHS | Lead-Free. Fully compliant to RoHS Directive 2011/65/EU |
| Shock | 500 G's, 1msec, 5 shocks in each of 6 directions |
| Sinusoidal Vibration | 10Hz to 55Hz with a double amplitude of 1.5mm, 10g's peak from 55Hz to 2000Hz, for 30minutes in each of three perpendicular directions |
| Random Vibration | 5.35G's RMS, 20 to 500Hz, per MIL-STD-202F, Method 214, 15minutes each axis |
| Seal | Hermetic |
| Marking Permanency | MIL-STD-202F, Method 215J |
| Packaging | Tape and Reel for Surface Mount Package; Bulk Pack in Foam for Thru-Hole Package |
| Storage Temperature Range | -55°C to +105°C |

Mechanical Specifications


Figure 1 – Package Drawing – Surface Mount

Pad termination finish: Gold flash < 10 μ inch, over Ni plated Cu

MARKING THIS SURFACE
 ** = MFG SITE CODE
 YYWW = DATE CODE
 XXXXXX = SERIAL NUMBER

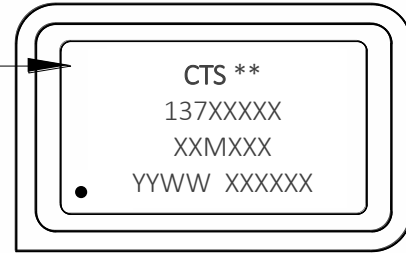

| PIN / PAD | FUNCTION |
|-----------|------------------|
| 1 | N/C or Vc |
| 7 | 0V & CASE GROUND |
| 8 | OUTPUT |
| 14 | Vcc |

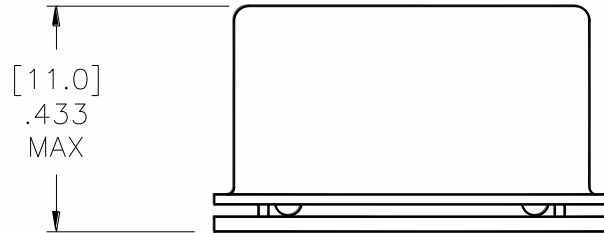

KEY: [MM]
INCH

TOLERANCE: [±.25]
±.010

[∅ 1.09]
∅ .043 CASTELLATION
(4) PLACES



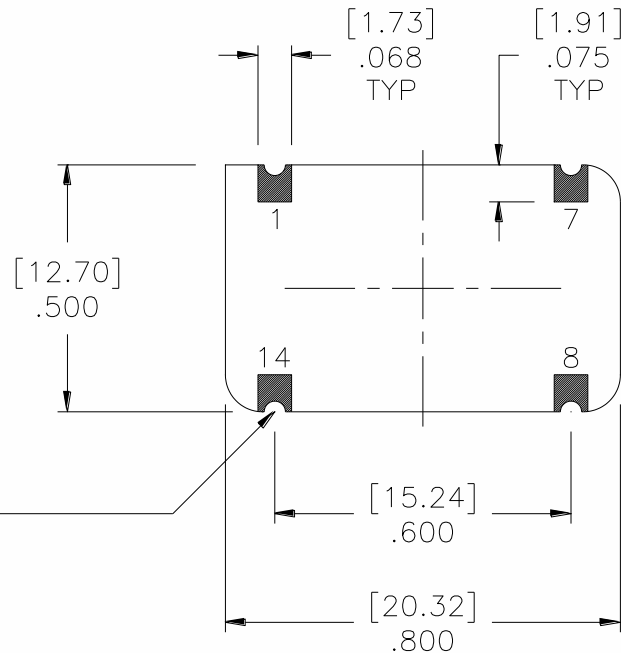


Figure 2 – Package Drawing – Through Hole

Lead Termination Finish: Solder Coated, Sn96.5% / Ag3.5%



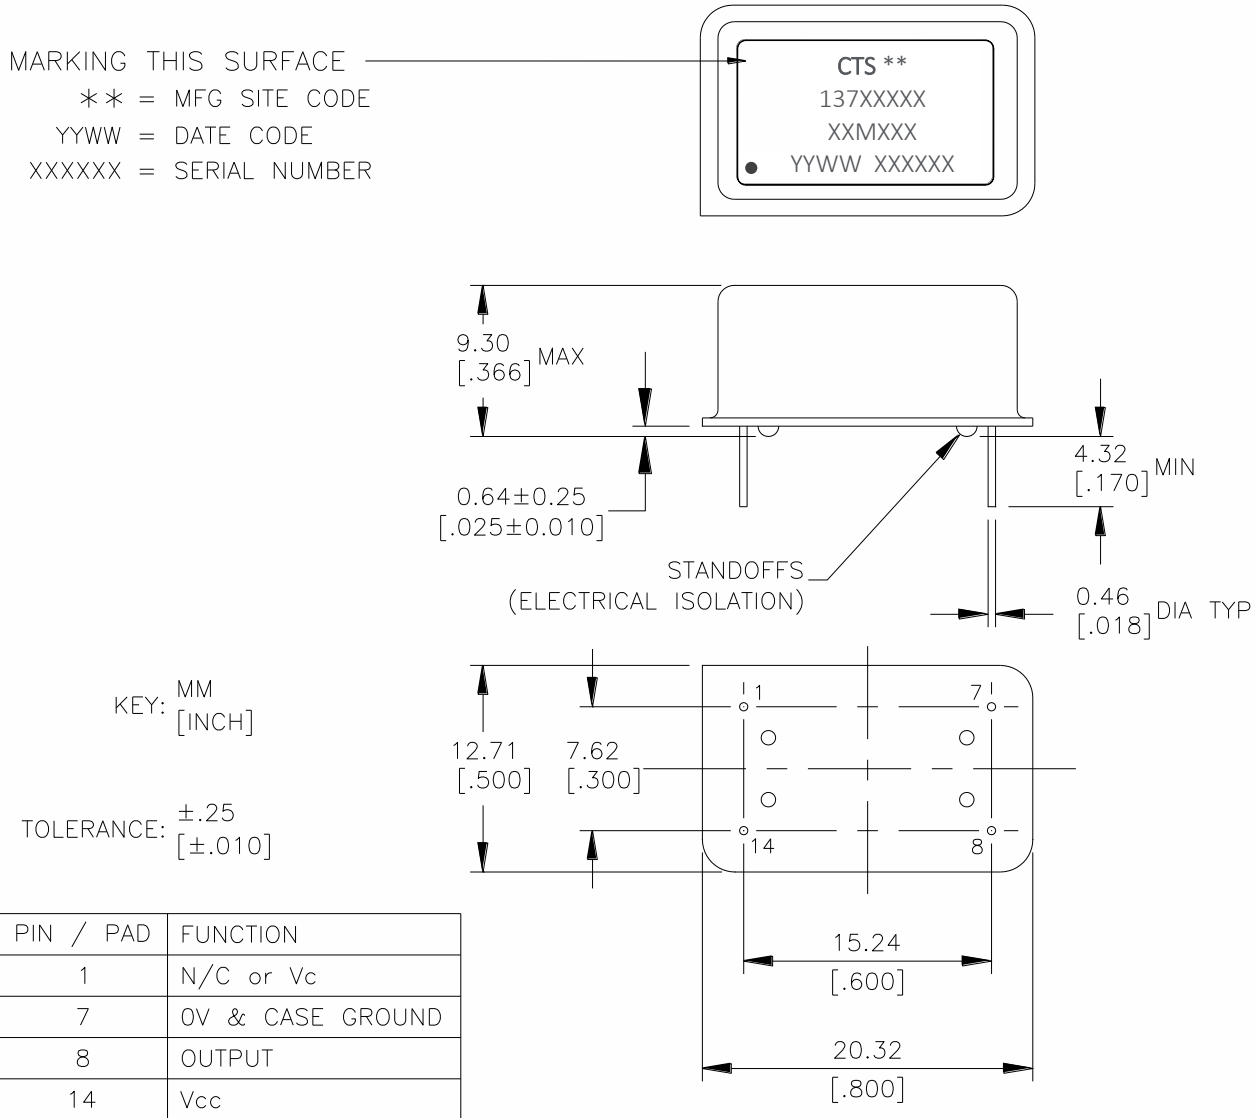


Packing: Tape and Reel

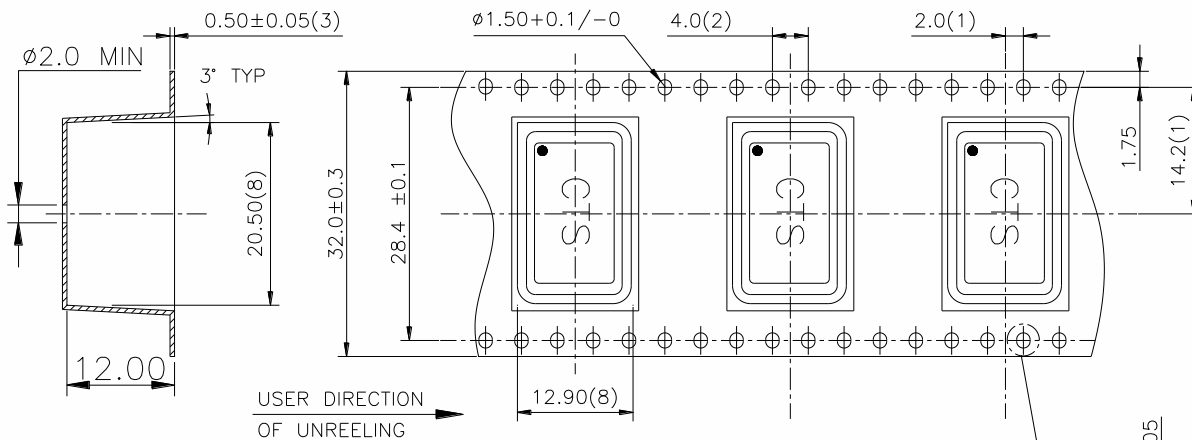


NOTE:

- (1) MEASURED FROM THE CENTERLINE OF SPROCKET HOLE TO CENTERLINE OF THE POCKET HOLE AND FROM THE CENTERLINE OF SPROCKET HOLE TO CENTERLINE OF THE POCKET.
- (2) CUMULATIVE TOLERANCE OF 10 SPROCKET HOLES IS ± 0.20
- (3) THIS THICKNESS IS APPLICABLE AS MEASURED AT THE EDGE OF THE TAPE
- (4) MATERIAL: BLACK POLYSTYRENE
- (5) DIM IN MM
- (6) ALLOWABLE CAMBER TO BE 1mm PER 100mm IN LENGTH, NON-CUMULATIVE OVER 250mm
- (7) UNLESS OTHERWISE SPECIFIED, TOLERANCE ± 0.10
- (8) MEASUREMENT POINT TO BE 0.3 FROM BOTTOM POCKET
- (9) SURFACE RESISTIVITY: FROM 10^5 TO 10^{11} OHMS/SO

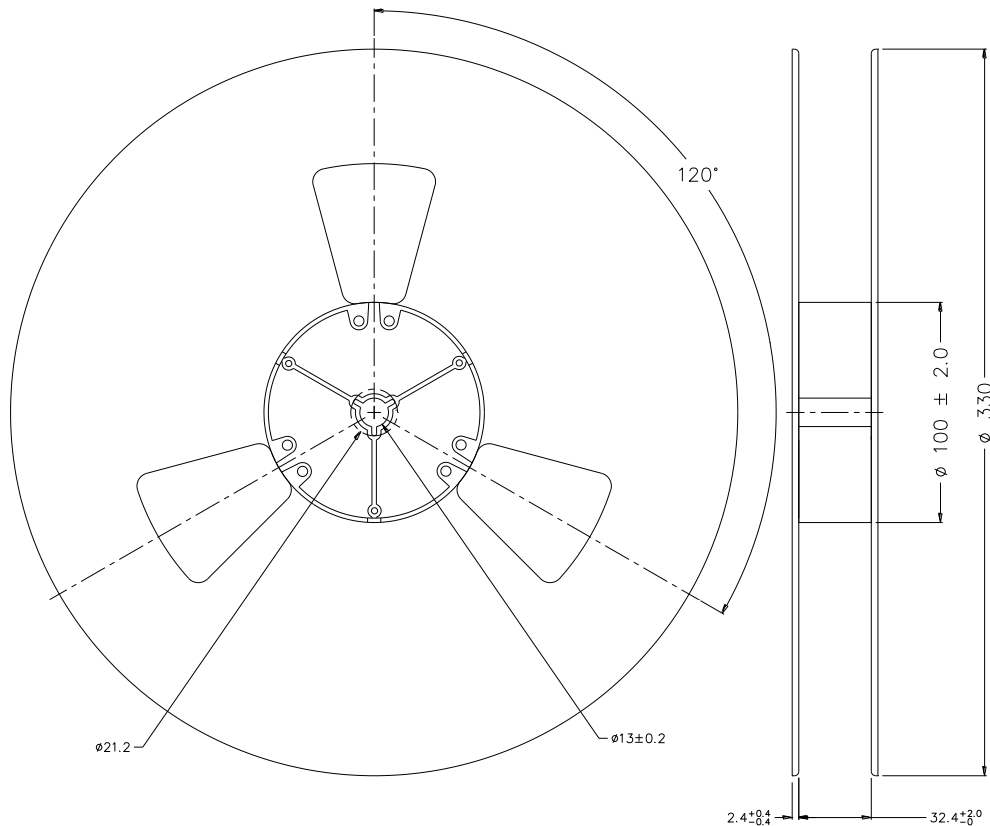

Reflow profile per IPC/JEDEC J-STD-020D

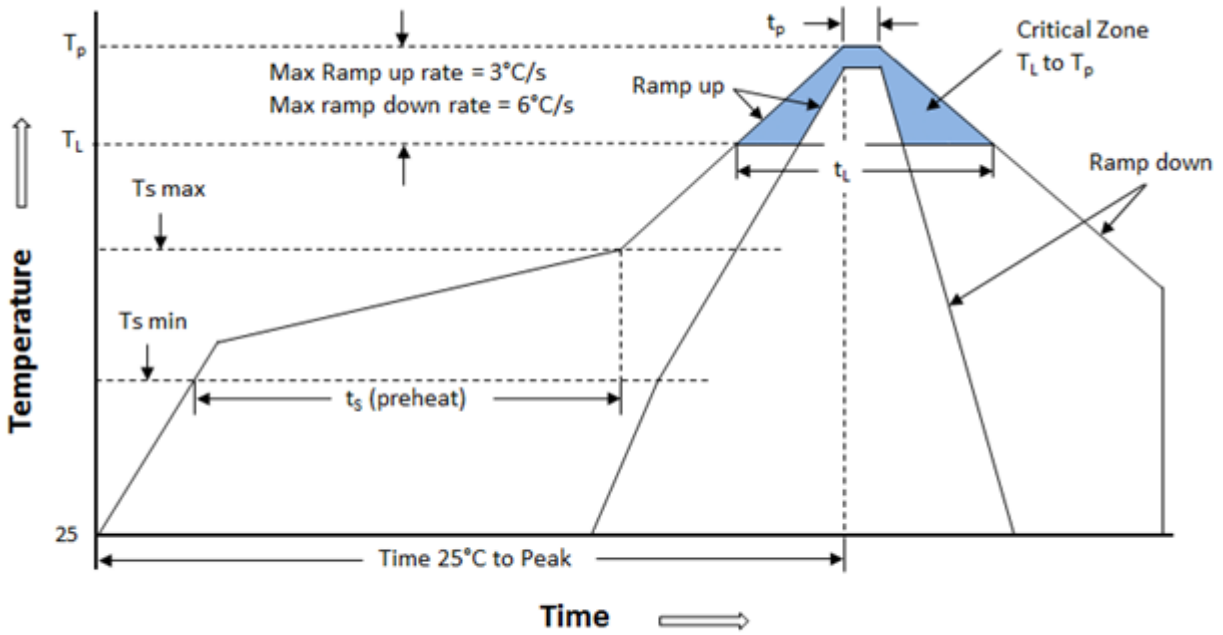

Note: The temperatures shown below represent the device body temperature

| | |
|--|--------------------------|
| T_s max to T_L (Ramp-Up Rate) | 3°C/second max |
| Preheat: | |
| Temperature Min (T_s Min) | 150°C |
| Temperature Typical (T_s Typ) | 175°C |
| Temperature Typical (T_s Max) | 200°C |
| Time (t_s) | 60-120 seconds |
| Ramp-Up Rate (T_L to T_p) | 3°C/second max |
| Time Maintained Above: | |
| Temperature (T_L) | 217°C |
| Time (T_L) | 60-150seconds |
| Peak Temperature (T_p) | 245°C max for 10 seconds |
| Time within 5°C of actual peak (T_p) | 30 seconds |
| Ramp-Down Rate | 6°C/second max |
| Time 25°C to Peak Temperature(T) | 8 second max |

This product is specified for use only in standard commercial applications. Supplier disclaims all express and implied warranties and liability in connection with any use of this product in any non-commercial applications or in any application that may expose the product to conditions that are outside of the tolerances provided in its specification.