




Series 223D

5.6x4.0mm Compact Tactile Switch

- Surface mount gull-wing terminal configurations
- Compatible with IR reflow and manual soldering
- Variety of actuator height options

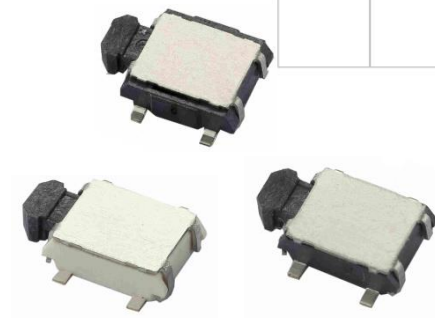

Ordering Information

Series	Terminal Type	Actuating Direction	Actuator Height "L"	Actuator Force	Packaging	Boss																									
223D	M1	S	A	A	R	B																									
<table border="1"> <thead> <tr> <th>Code</th> <th>Spec.</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>Surface mount gull wing type 1</td> </tr> <tr> <td>M2</td> <td>Surface mount gull wing type 2</td> </tr> </tbody> </table>		Code	Spec.	M1	Surface mount gull wing type 1	M2	Surface mount gull wing type 2	<table border="1"> <thead> <tr> <th>Code</th> <th>Spec.</th> </tr> </thead> <tbody> <tr> <td>S</td> <td>Side</td> </tr> </tbody> </table>		Code	Spec.	S	Side	<table border="1"> <thead> <tr> <th>Code</th> <th>Spec.</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>180 gf (M1 type only, black actuator)</td> </tr> <tr> <td>B</td> <td>220 gf (M2 type only, black actuator)</td> </tr> <tr> <td>C</td> <td>350 gf (M1 type only, black actuator)</td> </tr> </tbody> </table>		Code	Spec.	A	180 gf (M1 type only, black actuator)	B	220 gf (M2 type only, black actuator)	C	350 gf (M1 type only, black actuator)	<table border="1"> <thead> <tr> <th>Code</th> <th>Spec.</th> </tr> </thead> <tbody> <tr> <td>B</td> <td>With boss (black housing)</td> </tr> <tr> <td>Blank</td> <td>No boss (white housing)</td> </tr> </tbody> </table>		Code	Spec.	B	With boss (black housing)	Blank	No boss (white housing)
Code	Spec.																														
M1	Surface mount gull wing type 1																														
M2	Surface mount gull wing type 2																														
Code	Spec.																														
S	Side																														
Code	Spec.																														
A	180 gf (M1 type only, black actuator)																														
B	220 gf (M2 type only, black actuator)																														
C	350 gf (M1 type only, black actuator)																														
Code	Spec.																														
B	With boss (black housing)																														
Blank	No boss (white housing)																														
			<table border="1"> <thead> <tr> <th>Code</th> <th>Spec.</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>1.5mm</td> </tr> </tbody> </table>		Code	Spec.	A	1.5mm																							
Code	Spec.																														
A	1.5mm																														
					<table border="1"> <thead> <tr> <th>Code</th> <th>Spec.</th> </tr> </thead> <tbody> <tr> <td>R</td> <td>Tape & reel packaging</td> </tr> </tbody> </table>		Code	Spec.	R	Tape & reel packaging																					
Code	Spec.																														
R	Tape & reel packaging																														

Notes: Contact CTS for other common features not listed.



Electrical Specifications



Parameter	Conditions & Remarks	Min	Max	Unit
Contact Resistance			500	milliohms
Insulation Resistance	Between insulated terminals	100		Megohms
Dielectric Strength	1 minute between adjacent switches		250	VAC
Nonswitching Rating			50 or 12	mA or VDC

Mechanical and Environmental



Soldering	Maximum reflow temperature, 260°C for 5 seconds Maximum manual temperature, 350°C for 3 seconds
RoHS	Lead-Free. Fully compliant to RoHS Directive 2011/65/EU and 2015/863/EU
Operating Force	180, 220, 350 gf
Actuation Life	50,000 cycles
Actuator Strength	3 Kgf maximum
Travel	0.2 mm
Packaging	Standard tape and reel packaging
Operating Temperature Range	-40°C to +85°C
Storage Temperature Range	-40°C to +85°C

Mechanical Specifications

Figure 1 – 223DM1SA...RB, 223DM1SA...R, Surface Mount Gull Wing Type1

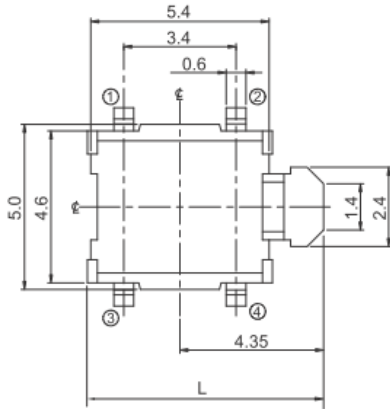

CIRCUIT DIAGRAM



PCB LAYOUT

DIMENSION : mm
STANDARD TOLERANCE :
X (1 PLACE) : ±0.10








Figure 2 – 223DM2SA...RB, 223DM2SA...R, Surface Mount Gull Wing Type2

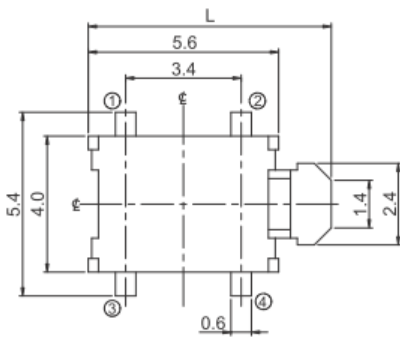


CIRCUIT DIAGRAM



PCB LAYOUT

DIMENSION : mm
STANDARD TOLERANCE :
X (1 PLACE) : ±0.10

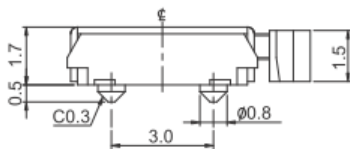


Packing: Tape and Reel

223DM1..., Surface Mount Gull Wing Type 1


The packing specifications :

Structure and materials :

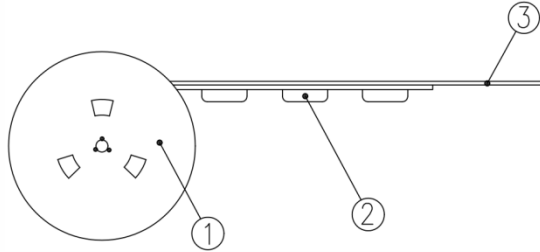

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS


1. Packing quantity : 2,000 pcs/reel
2. More than 10 empty pockets should remain at each end of the carrier tape for each reel.
3. Shortage less than 10 pcs a reel is acceptable but more than 3 consecutive empty pockets are allowed.
4. Stripping strength of cover tape is between 10 gf to 70 gf and stripping angle should be within 165°~180°.
5. The product in the pocket of carrier tape should be placed in a specified correct position.
6. Tape and reel per EIA-481.
7. Dimensions :

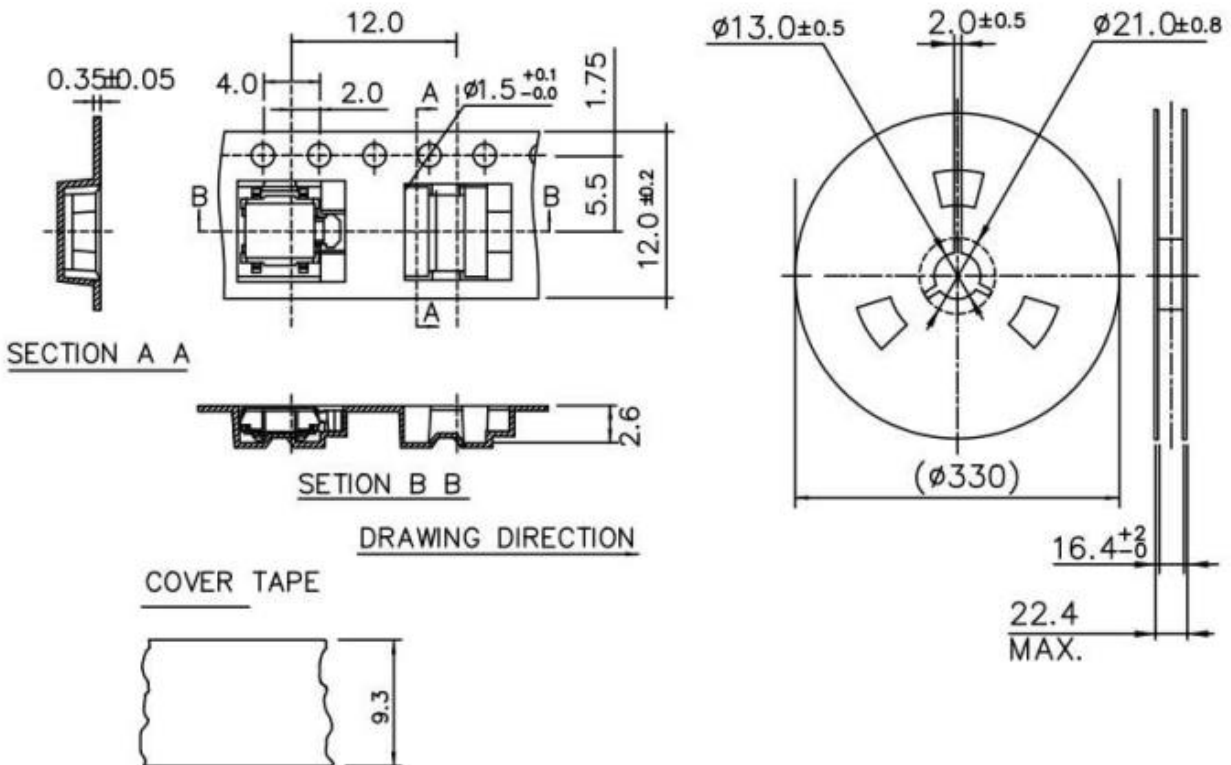

223DM2..., Surface Mount Gull Wing Type 2

The packing specifications :

Structure and materials :

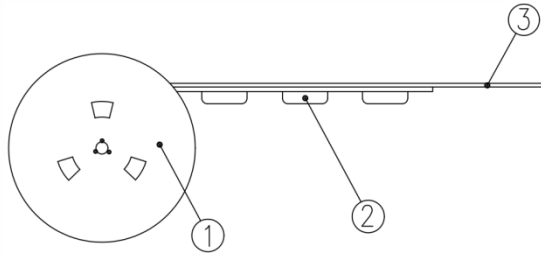

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

1. Packing quantity : 3,300 pcs/reel
2. More than 10 empty pockets should remain at each end of the carrier tape for each reel.
3. Shortage less than 10 pcs a reel is acceptable but no more than 3 consecutive empty pockets are allowed.
4. Stripping strength of cover tape is between 10 gf to 70 gf and stripping angle should be within 165°~180°.
5. The product in the pocket of carrier tape should be placed in a specified correct position.
6. Tape and reel per EIA-481.
7. Dimensions :

