

UMD013A - PRELIMINARY Band 13 UMD Series Duplexer

Features


- Low Loss with High Rejection
- Superior power handling and reliability
- Universal footprint across all UMD Series frequency bands
- Available for either PCB mounting or with various connectors including SMA, SMP-Max, and other options.

Applications

- Wireless Infrastructure applications
- High-performance carrier-grade active antennas and small-cells for 4-10W at the antenna port.
- Wide-band DAS, Repeaters, or small-cells requiring multi-channel or carrier aggregation

Description

Ceramic duplexer supports a universal footprint across all FDD frequency bands < 1 GHz enabling the use of a common system PCB. Provides superior rejection, insertion loss, reliability, as well as both peak and average power handling compared to other duplexer technologies.

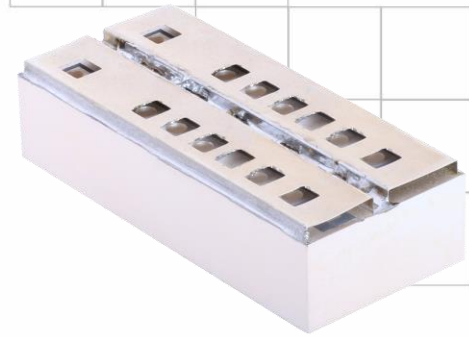

ESTIMATE Part Dimensions: 64 × 29 × 17 mm • <105 g
Materials: Ag plated ceramic block with tin plated brass shield

Electrical Specifications **(These specs are NOT guaranteed. Will be revised following prototype run.)**

Parameter	Frequency (MHz)	Typical at 25°C	Spec. at 25°C	Spec. over -40°C to +85°C
Nominal Impedance	-	50 ohms	-	-
Average Input Power	-	-	-	20.0 Watt max
Peak Input Power	-	-	-	200 Watt max
Passive Intermodulation (2x 5W)	-	-	-	-106 dBm

Antenna to UL Response

Passband Insertion Loss (5 MHz avg)	777 - 787		1.9 dB max
Passband Return Loss	777 - 787		16 dB min
Attenuation:	746 - 756		77 dB min

DL to Antenna Response

Passband Insertion Loss (5 MHz avg)	746 - 756		1.9 dB max
Passband Return Loss	746 - 756		16 dB min
Attenuation:	777 - 787		80 dB min

DL to UL Response

Attenuation for UL band	777 - 787		80 dB min
Attenuation for Transition band	756 - 777		55 dB min
Attenuation for DL band	746 - 756		77 dB min

Note: CTS tests each unit to the critical specifications above. Subsequent audits may deviate due to repeatability among different test systems which shall not exceed these allowances.

Specification Allowance	
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Attenuation	1.0 dB




PRELIMINARY - UMD013A

Band 13 UMD Series Duplexer

Mechanical Drawing


Dim.	Nominal (mm)	Tolerance (±mm or Max)
A	64.00	Max
B		
C		
D		
E		
F		
G		
H		
I		
J		0.13
K		0.20

PCB Layout (Top-Down View)

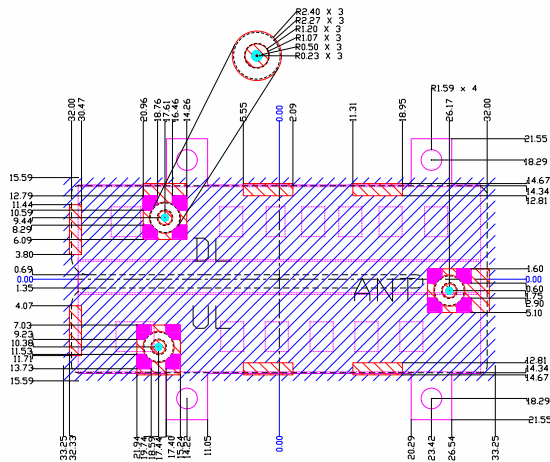

- Filter Outline
- Exposed Conductor for Surface Mount
- Exposed Conductor for SMP-MAX Connector
- Pin for Pinmount
- Solder Resist Over Conductor (Keep Out Area)
- Solder Resist over Dielectric
- Via for Pin Mount

Packaging and Marking



Product is shipped in Pre-formed foam trays

Electrical Response

The trays have xx slots each with one filter per slot. Boxes are packed with 12 Trays per box for a total of xx filters per box.



Electrical Specifications – Supplemental Spectrum Specifications

Parameter	Frequency (MHz)	Typical at 25°C	Spec. at 25°C	Spec. over -40°C to +85°C
Antenna to UL Response				
Attenuation:	1 - 698			>60 dB min
	728-746			>47 dB min
	757-768			15-20 dB min
	807			15-20 dB min
	859 - 894			>47 dB min
DL to Antenna Response				
Attenuation:	1 - 698			>60 dB min
	698-716			>50 dB min
	788-798			>50 dB min
	798-1910			>60 dB min

Ordering Options

Part Number	Code	Connector Option Description
UMD013A	[blank]	No pins or connectors
	-C3	3 SMP-Com Male with limited detent
	-CF2	SMP-Com Male with limited detent antenna port + 2 SMP female cables
	-M3	3 SMP-Max Slide-type Male
	-NS2	N-type antenna port + 2 SMA Male (CMD only)
	-P3	3 thru-hole pins for soldering to PCB (UMD only)
	-S3	3 SMA Female