


# VFOV302

## OCXO – Stratum 2 Compliant

### Features

- Standard frequencies to 100MHz
- To  $\pm 0.1$  ppb frequency stability vs. temperature
- Low jitter and phase noise
- Sinewave or HCMOS output

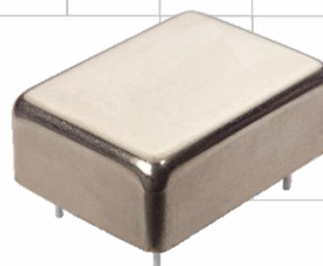

Dimensions: 35.4 x 26.7 x 16.25 mm

### Description

The VFOV302 is a high stability oven controlled crystal oscillator in a 35 x 27 mm industry standard package. This oscillator offers temperature stabilities to 0.1 ppb and aging rates down to 0.2 ppb/day. Applications for this product include Reference for telecom systems, Rubidium standard replacement, and Stratum 2 clocking.

### Ordering Information

Model	Stability	Temp Range	Supply Voltage	Voltage Control (EFC)	Aging	Output	Frequency
<u>VFOV302</u>	— <u>51</u>	<u>B</u>	<u>D</u>	<u>V</u>	<u>C</u>	<u>H</u>	— <u>xxxMxxx</u>

Code	Spec.
19	$\pm 1 \times 10^{-9}$
51	$\pm 5 \times 10^{-10}$
31	$\pm 3 \times 10^{-10}$
21	$\pm 2 \times 10^{-10}$
11	$\pm 1 \times 10^{-10}$

Code	Spec.
A	0 to 50°C
B	0 to 70°C
C	-10 to 60°C
D	-20 to 70°C
E	-30 to 70°C
G	-40 to 85°C

Code	Spec.
V	VCXO
T	No tuning

Code	Spec.
D	5V $\pm$ 5%
E	3.3 $\pm$ 5%
B	12V $\pm$ 5%

Code	Spec.
H	HCMOS
S	Sinewave

Code	Per day	Per year
C	1ppb	0.1ppm
D	0.5ppb	50ppb
G	0.2ppb	30ppb

Not all stabilities are available for all frequencies. Please consult factory.

### Part Number Example:

**VFOV302-51BDVCH-10M000**



## Electrical Specifications

Parameter	Conditions & Remarks	Min	Typical	Max	Unit
Operating Conditions					
Operating Temperature Range	See “Ordering Information” table	-40	-	+85	°C
Supply Voltage	V <sub>CC</sub>	3.15	3.3	3.45	Vdc
		4.75	5.0	5.25	
		11.4	12.0	12.6	
Power Consumption	Steady state @ 25°C	-	1.25	1.75	W
	Steady state @ -30°C	-	2.0	2.4	
	Start-up	-	3.5	6.5	
Frequency Stability					
Frequency Range	F <sub>NOM</sub>	8.0	10.0	100	MHz
Temperature Stability	Option A : 0°C to +50°C. See “Ordering Information” table.	-	-	±0.1	ppb
Voltage Stability	V <sub>CC</sub> ±5%	-	±0.2	-	ppb
Aging (After 30 days, 8-10MHz)	Per day	-	-	±0.2	ppb/day
	Per year	-	±0.3	±30	ppb/year
	20 years			±0.35	ppm
Retrace	After 30 minutes (10MHz)	-	-	±3.0	ppb
G-Sensitivity	Worst axis	-	1	-	ppb/g
Allan Deviation	Tau = 1 sec, 10MHz	0.5	2	-	X10 <sup>-12</sup>
Warmup-Up Time	T <sub>A</sub> =25°C; to within 0.01 ppm accuracy	-	3	5	minutes
Output Parameters					
HCMOS (order code H)					
Levels	V <sub>H</sub>	3.8	-	-	V
	V <sub>L</sub>	-	-	0.4	V
Load	10 MHz	10kΩ / 15pF			
Duty Cycle		45		55	%
Sinewave Output (order code S)					
Level		+6	+8	+11	dBm
Load (Sinewave)	R <sub>L</sub>	-	50	-	Ω
Phase Noise (10MHz)	1Hz	-	-	-95	dBc/Hz
	10Hz	-	-	-125	
	100Hz	-	-	-145	
	1Khz	-	-	-155	
	10Khz	-	-	-160	
	100Khz	-	-	-160	
For additional phase noise performance options, consult factory.					
Sub-harmonics	<30 MHz	-	None	-	dBc
	>30 MHz	-	-	-40	
Harmonics		-	-	-30	dBc

## Electrical Specifications continued

### Electronic Frequency Control (option)

Control Voltage	V <sub>C</sub>	0	-	4.2	V	
Pull Range		±0.35	±0.4	-	ppm	
Deviation Slope	Monotonic, positive	-	0.2	-	ppm/V	
Reference output	V <sub>REF</sub>	@25°C, F <sub>NOM</sub>	4.0	4.2	4.4	V



### Absolute Maximum Ratings

Supply Breakdown Voltage	$V_{CC}$	3.3V Model	-0.5	-	+4.0	V
		5V Model	-0.5	-	+6.0	
		12V Model	-0.5	-	+14.4	
Control Voltage	$V_C$		-1	-	+6	V

### Mechanical and Environmental

Mechanical Shock	Per MIL-STD-202, 30g, half sine, 11 ms
Vibration	Per MIL-STD-202, 5g, swept sine 10 to 500Hz
Soldering Conditions	260°C for 10s, hand solder only
Storage Temperature	-60°C to +90°C
Marking	Laser engraved

### Mechanical Specifications

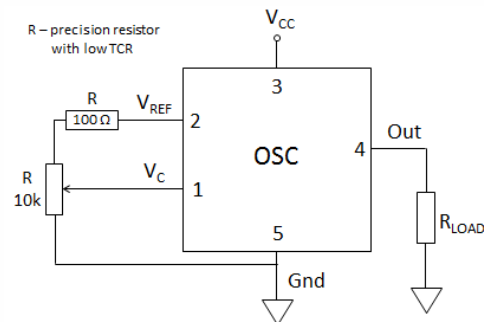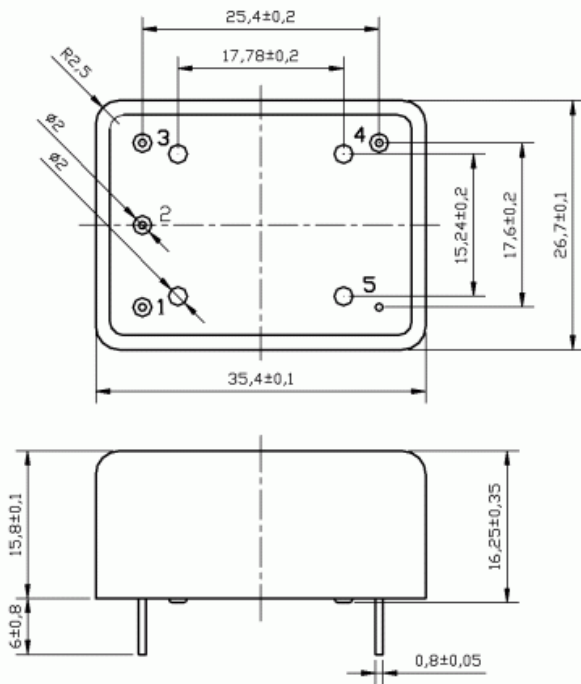

Pin	Connection
1	$V_C$
2	$V_{REF}$
3	$V_{CC}$
4	Output
5	Ground

This product is specified for use only in standard commercial applications. Supplier disclaims all express and implied warranties and liability in connection with any use of this product in any non-commercial applications or in any application that may expose the product to conditions that are outside of the tolerances provided in its specification.