

Features

- Small Size
- Low Ripple
- High Rejection


Description

Surface mount, silver (Ag) coated barium ceramic filter. Developed for use in Broadband Wireless applications.

Weight: 0.75 grams typical.

Material: Filter is composed of a ceramic block plated with Ag.

Filter complies with RoHS standards.

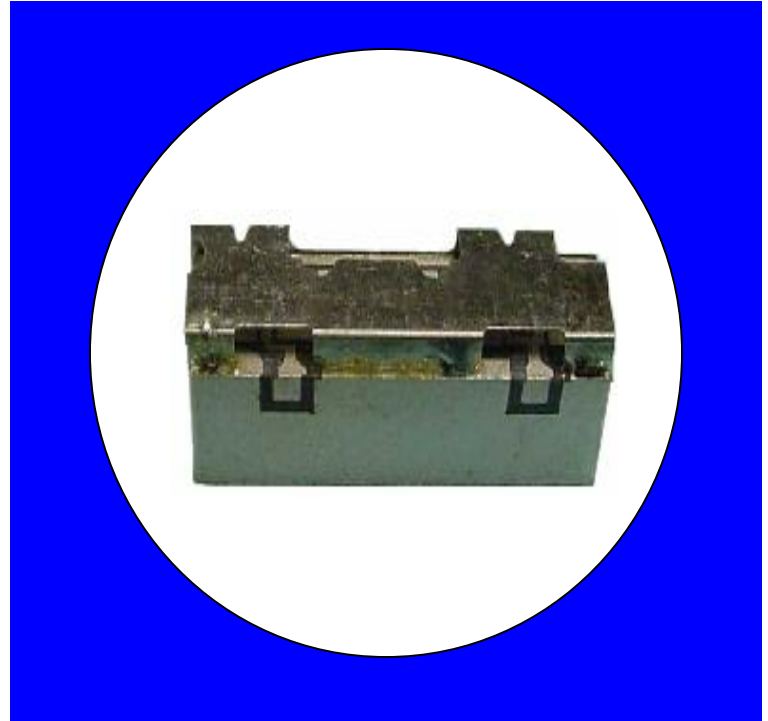

Electrical Specifications

Parameter	Frequency MHz	Typical @ 25°C	Specification @ 25°C	Spec over -40°C to +85°C
Response				
Passband Iloss	824 - 849	-2.10	-2.40	-2.60
Passband Ripple	824 - 849	0.90	1.10	1.20
Passband Return Loss @ Port 1	824 - 849	-14.50	-12.00	-12.00
Passband Return Loss @ Port 2	824 - 849	-14.50	-12.00	-12.00
Attneuation	0.1 - 2300	-22.00	-19.00	-19.00
	2390	-12.50	-10.00	-10.00
	2483	-12.50	-10.00	-10.00
	2570	-24.00	-22.00	-22.00
Power into any port		1 Watt max		

Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:


Specification Allowance	
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Stopbands	1.0 dB

*This product is covered by one or more of the following U.S. and foreign patents including: US 4,692,726;US 4,742,562; US 4,800,348;US 4,829,274;US 5,146,193;EP 0573597;DE 0573597;FR 0573597;JP 508149/92;KR 142171;US 5,162,760;US 5,218,329;US 5,250,916;US 5,327,109;US 5,488,335;CA 2114029;FR 9306297;GB 2273393;JP 3205337;KR 115113;CN 93106228.4;US 5,512,866;EP 0706719;DE 0706719;FR 0706719;GB 0706719;CN 95190359.4;US 5,602,518;US 5,721,520;US 5,745,018;EP 0910875;DE 0910875;DK 0910875;FR 0910875;GB 0910875;IE 0910875;JP 505182/98;KR 10-323013;US 5,994,978;US 6,462,629;CN 00810420.4;US 6,559,735;US 6,650,202;US 6,834,429.Other US and foreign patents pending.

CTS Corporation 2006 reserves all copyrights in the layout, design and configuration of the patterns on this product.

Mechanical Drawing



Revision B - Origin Date: April, 2008 – Revision Date: July 26, 2011

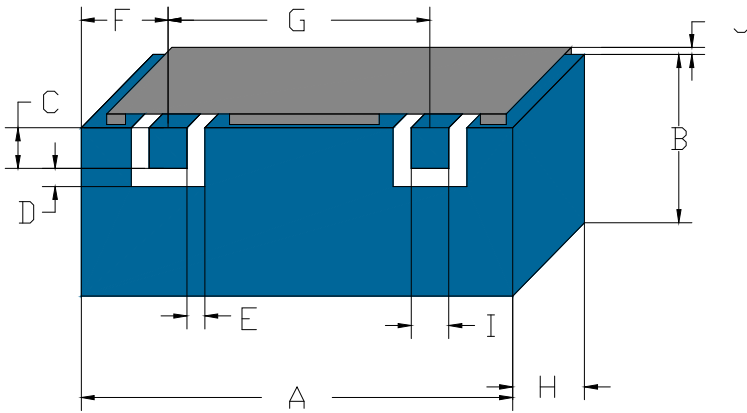

Dim	Nominal (mm)	Tolerance (mm) +/- or max
A	16.41	Max
B	8.50	Max
C	1.00	0.13
D	0.50	0.13
E	0.50	0.13
F	3.80	0.13
G	9.40	0.13
H	4.60	Max
I	1.00	0.13
J	1.00	Max


Electrical response

PCB Layout

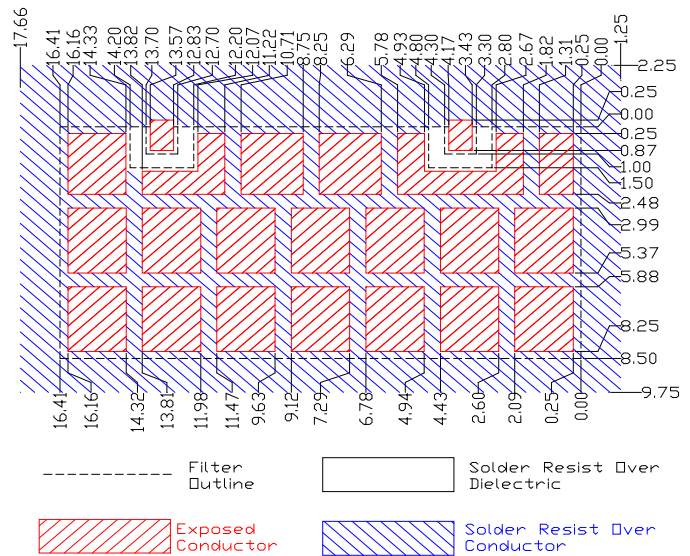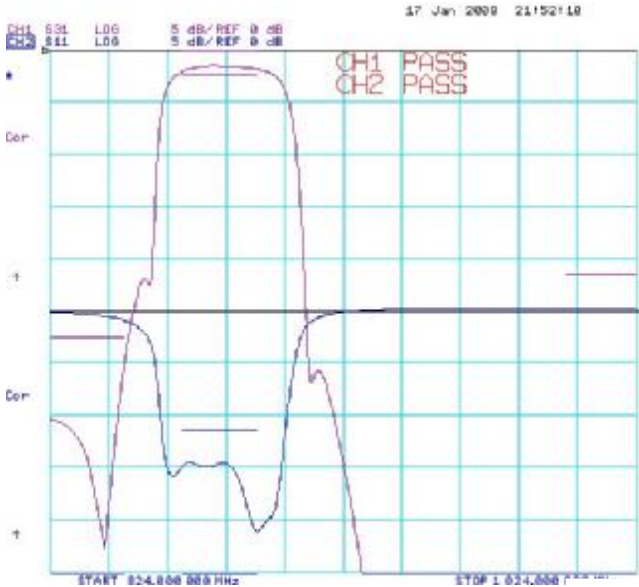


Packaging and Marking

DIMENSION	UNITS	SPECIFICATION
REEL DIAMETER	mm	330
REEL WEIGHT	kg	400
REEL QUANTITY	ea.	500



CTS
 603
 YWW

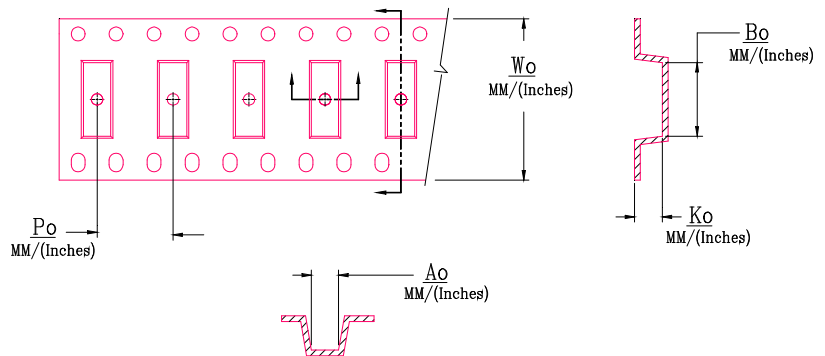

Wo	Ao	Bo	Ko	Po
Inches/mm	Inches/mm	Inches/mm	Inches/mm	Inches/mm
1.26"/32	0.394"/9.80	0.657"/16.7	0.203"/5.15	0.630"/16.0